

# SLIM TYPE ANALOG SIGNAL ISOLATED TRANSMITTER

**GT**

## ● FEATURES:

Accuracy:  $\pm 0.1\%$  R.O (DC / Resistor / Potentiometer / PT-100 / Load Cell)  
 $\pm 0.2\%$  R.O (AC)

Dimension small

High stability , non-flammable case(PC) , high safety

## ● Order Information : GT - code1 code2 - code3 - code4




code1	Input Type	code2	Voltage	code2	Current	code2	Potentiometer	code2	Resistor	code2	RTD(PT-100)	code2	Load cell	code3	Aux Power	code4	Output 1
D	DC	V1	0~50mV	A2	0~200 μ A	P1	500Ω~10KΩ	I2	0~100Ω	T1	-50~50°C	L1	1mV/V EX.5V	A	AC/DC 100~240V	1	4~20mA
A	AC(AVG)	V2	0~5V	A3	0~2mA	P2	10KΩ~100KΩ	I3	0~1KΩ	T2	0~50°C	L2	2mV/V EX.5V	D	AC/DC 22~60V	4	0~10V
M	AC(Trms)	V3	1~5V	A4	0~20mA	P3	100KΩ~1MΩ	I4	0~10KΩ	T3	0~100°C	L3	3mV/V EX.5V			L	Loop Power 15~30 V 4~20 mA
P	Potentiometer	V4	0~10V	A6	4~20mA	PO	Option	I5	0~100KΩ	T4	0~200°C	L4	1mV/V EX.10V			O	Option
I	Resistor	V5	0~36V	AO	Option			IO	Option	T5	0~400°C	L5	2mV/V EX.10V				
T	RTD(PT100)	V6	0~300V							T6	0~600°C	L6	3mV/V EX.10V				
L	Load cell	V7	0~600V							TO	Option	LO	Option				
2	2 wire sensor	VO	Option														
3	3 wire sensor																
4	4 wire sensor																

## ● SPECIFICATION:


Accuracy:	$\pm 0.1\%$ R.O(DC/Resistor/RTD PT100 /Load cell) $\pm 0.2\%$ R.O(AC)
Zero Adjustment:	$\leq \pm 5\%$ R.O
Span Adjustment:	$\leq \pm 10\%$ R.O
Output Response Time:	$\leq 250\text{ms}$ (0~90%)
Output Capability:	Voltage Output: $\leq 20\text{mA}$ Current Output: $\leq 10\text{V}$
Temperature Coefficient:	100ppm/ $^{\circ}\text{C}$ (0~60 $^{\circ}\text{C}$ )
Operating Environment:	0~60 $^{\circ}\text{C}$ ; 20~90% RH (non-condensing)
Storage Environment:	-10~70 $^{\circ}\text{C}$ ; 20~90% RH (non-condensing)
Power supply:	AC/DC 100~240V AC/DC 22~60V
Isolation:	Input/Output/Power/Case
Surge test:	2KVac / min
Insulation Resistance:	>100MΩ with 500 Vdc
Input Impedance:	Voltage: > 2V for 20KΩ/V $\leq 2\text{V}$ for > 200MΩ Current: $\geq 0.2\text{A}$ at 100mV $< 0.2\text{A}$ at 1V
Installation:	DIN Rail 35mm(EN50022)
Weight:	165g(Including packaging)

## ● CALIBRATION:

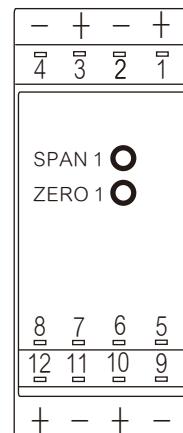


- ◆ Steps:
1. Input the zero value and adjust the ZERO VR to the zero point.
  2. Input the span value and adjust the SPAN VR to the span point.

## ● DIMENSION:

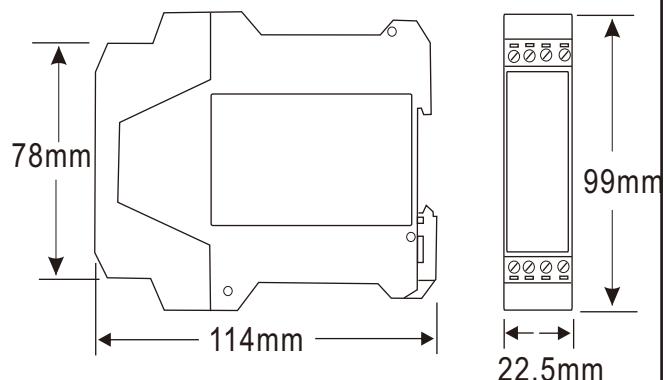


## ●WIRING CONNECTION :


### ●Voltage、Current

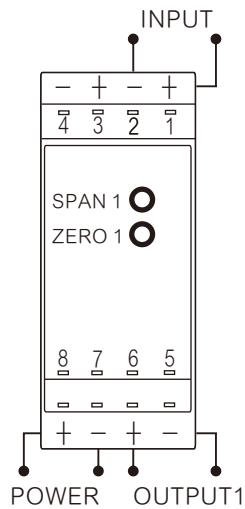


### ●2、3wire sensor

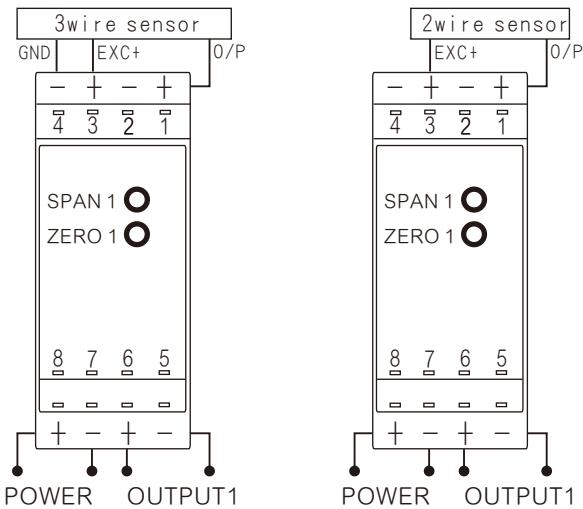


### ●Temperature(PT-100)

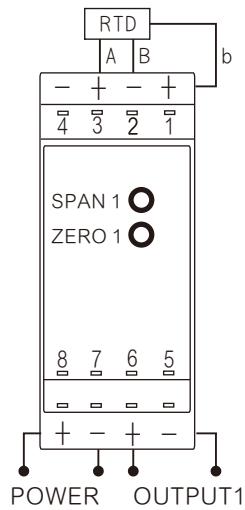

### ●4wire sensor、Load cell

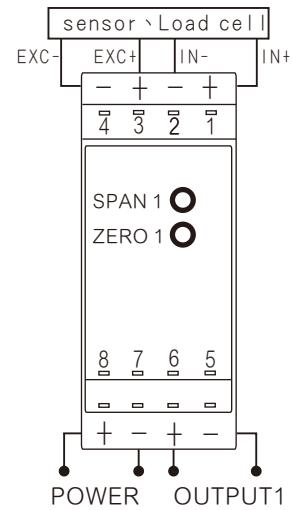

### ●3 wire Potentiometer

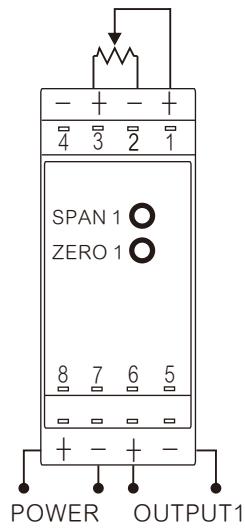

### ●Resistor

