

RCD-BAC Room CO₂ and Temperature Sensors with BACnet

The RCD-BAC sensors are designed to detect carbon dioxide concentration and temperature in the room spaces and have built-in BACnet MS/TP communication interface. The CO₂ sensor calibrate automatically its measurement. The RCD-BAC sensors have linear 0..10V signals outputs relating to CO₂-concentration and other measurements. The sensors can be used for demand controlled ventilation in buildings.

The RCD-BAC sensors can be installed on a wall surface or on a wall mounting box in dry indoor environment. The RCD sensors come with a number of options such as display, active setpoint, extra resistive/digital inputs, occupancy detection, lux level and, 0..10Vdc measurement and passive resistive sensor elements.

The RCD-BAC sensors have an additional resistive and a digital inputs for integrating local measurements such as window contacts or external temperature sensors.

The RCD-BAC sensors can also operate as CO₂, Temperature, Light Level or Humidity controllers offering single enclosure measurement and control solutions. Other features include maximum demand control for ventilation plants.




Ordering guide		Type	0	1	2	3	4	5	6
0 BACnet room transmitter			6041						
1 Device type	Room CO ₂ transmitter, 3AO, 2DO, 1RI, 1DI	RCD-BAC		9					
	Room CO ₂ and humidity transmitter, 3AO, 2DO, 1RI, 1DI	RCD-BAC-RH		B					
2 Display	No display				0				
	Display	-LCD			1				
	Red, yellow and green indicator lights	-AL			2				
3 Setpoint knob / PIR	No setpoint knob or PIR					0			
	Active setpoint knob	-SP				1			
	Passive setpoint knob	-SPR					2		
	Occupancy detection and light level sensor	-LL						3	
4 Push buttons	No push buttons						0		
	One push button	-PB					1		
	Two push buttons	-PB2					2		
	Three push buttons	-PB3					3		
	Four push buttons	-PB4					4		
	Push buttons for setpoint	-SPB					5		
	Push buttons for setpoint and one push button	-SPB-PB					6		
	Push buttons for setpoint and two push buttons	-SPB-PB2					7		
5 Inputs / outputs	No inputs / outputs							0	
	Second digital input	-DI2						1	
	Second resistive input (not available with SP/SPR options)	-RI2						2	
	Second digital input and second resistive input (not available with SP/SPR options)	-DI2-RI2						3	
	Two 0..10 Vdc inputs (replaces resistive input)	-AI						5	
	Second digital input and two 0..10 Vdc inputs (replaces resistive input)	-DI2-AI						6	
	Passive temperature sensor (NTC 10)	-TE-NTC10						7	
	Second digital input and passive temperature sensor (NTC 10)	-DI2-TE-NTC10						8	
6 Body colour	White (RAL 9010)								0
	Anthracite grey	-GR							B

Technical Data

Power Supply	Power supply	24Vac/dc -10%/+15%, max 1VA
Displays and Interfaces	Option -LCD	LCD Display for Showing CO ₂ , Temperature, Humidity, Light Level (configurable through the tool or BACnet)
	Option -AL	Green, Amber, Red Traffic Light LEDs (only available if -LCD not fitted) (alarm limits 750 and 1250ppm, adjustable)
	Option -SP	Setpoint Potentiometer Knob (network or control; adjustable min/max limits) <i>Note: If this option is selected RI2 /AI Option (resistive input 2) are no longer available.</i>
	Option -SPB	Setpoint with 2 Push Buttons (network or control; adjustable min/max limits) <i>Note: Please select/order LCD option to visualise the setpoint. If this option is selected PB/PB2 options are replaced by setpoint buttons. If PB/PB2 are still required these are fitted underneath the SPB buttons (Locations PB3/PB4 Binary Inputs)</i>
	Option -SPR	Setpoint Potentiometer Knob with Passive 10KOhm Potentiometer Output
	Option -PB	Push Button with Delay Timer; status available through DO1, DO2 or via Network <i>Note: If SPB option is also selected, the button is fitted underneath the SPB buttons (Location PB3 Binary Input)</i>
	Option -PB2	2 x Push Buttons with Delay Timer; status available through DO1, DO2 or via Network <i>Note: If SPB option is also selected, the buttons are fitted underneath the SPB buttons (Location PB3/PB4 Binary Inputs)</i>
	Option -PB3	3 x Push Buttons with Delay Timer; status available through DO1, DO2 or via Network <i>Note: If SPB option is also selected, the PB3 option is not available</i>
Option -PB4	4 x Push Buttons with Delay Timer; status available through DO1, DO2 or via Network <i>Note: If SPB option is also selected, the PB4 option is not available</i>	
Signal Outputs	Analogue Outputs	3 x 0..10Vdc < 5mA; 100k min impedance for 1% accuracy
	Digital Outputs	2 x 24Vac 2A Triac; requires 24Vac Power Supply (DO1 & DO2)
Signal Inputs	Resistive Input (Standard)	1 x NTC10/Resistive Input, 0..50kOhms (network value)
	Digital Input (Standard)	1 x Digital Input, Volt-Free Contact, Impedance <1KOhm Pulse Counting: Max 25Hz, Min Pulse Length 20mA (Volatile)
	Option -RI2	Additional NTC10/Resistive Input, in total 2 x NTC10/Resistive Inputs, 0..50kOhms (network values)
	Option -DI2	Additional Digital Input, in total 2 x Digital Inputs, Volt-Free Contacts (network values), Impedance <1KOhm Pulse Counting: Max 25Hz, Min Pulse Length 20mA (Volatile)
	Option -AI	2 x 0..10Vdc Voltage Inputs (Replaces RI1 & RI2)
Sensing Characteristics	Carbon Dioxide (CO ₂)	
	Range	0..5000ppm CO ₂ (Range Adjustable)
	Accuracy	± 50ppm + 3% of the reading @ 25°C (@77°F)
	Technology	Auto Calibrating; Patented Non-Dispersive Infrared (NDIR)
	Non-Linearity	<1% FS
	Warm-Up Time	<20 seconds
	Response Time	2 minutes
	Temperature	
	Range	0..50°C (32..122°F)
	Accuracy	±0.5°C
	Humidity; Option -RH	
	Range	0..100%rH
	Accuracy	±2% rH (within 0..90% rh)
Light Level and Occupancy; Option -LL	<i>Note: If this option is selected RI1 (resistive input) / AI (0-10Vdc) are no longer available and need to be left disconnected.</i>	
Range	0..3,000 Lux	
Occupancy	Infrared Detection (Adjustable Delay)	

Communication	BACnet Communications	
	Protocol	BACnet MS/TP
	Interface	RS485; maximum 63 devices
	MAC Addressing	0..63 via a bit switch; 0..247 via tool / network
Connections	Terminal Connections	Solid and Stranded Cable; 55° Angle for Wiring Maximum Size: 0.05 to 1.5mm ² (EN ISO) / 14 to 30 AWG (UL) Rising Clamp: Size 2.5 x 1.9mm
	Operating	
Environmental Conditions	Temperature	0°C...+50°C (32..122°F)
	Humidity	0...95%rh (non-cond.)
	Storage	
	Temperature	-30°C...+70°C (-22..158°F)
Standards	CE Conformity	CE Directive 2004/108/EY EN61000-6-3: 2001 (Generic Emission) EN61000-6-1: 2001 (Generic Immunity).
	Degree of Protection	IP20
Housing	Housing Material	ABS Plastics, Self Extinguishing, RAL9010 Pure White
	Mounting	Wall or Junction Box Mounting
	Dimensions	W86 x H120 x D29mm
	Weight	180g

Wiring Terminals

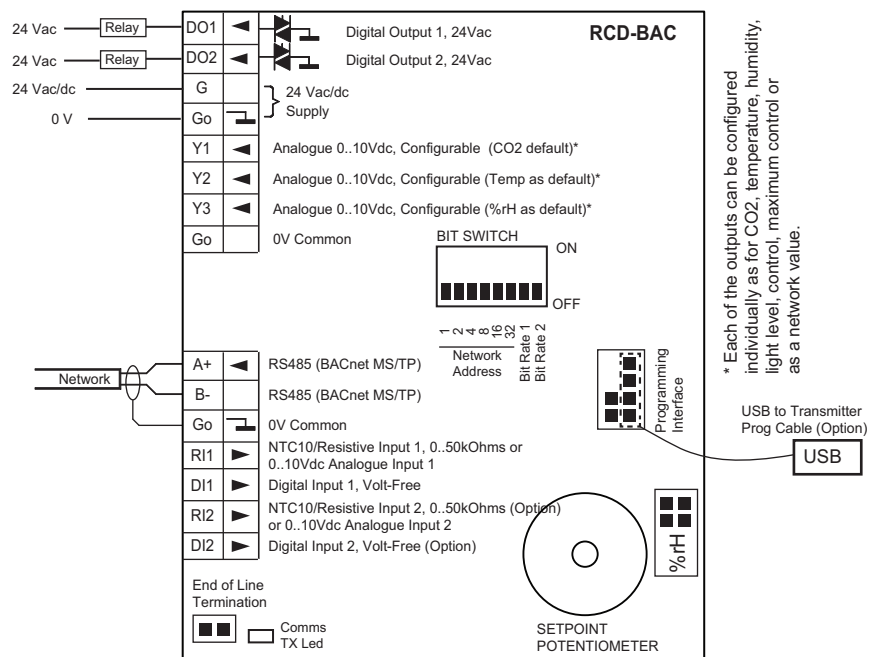

DO1	Digital Output; 24Vac Triac Switching to 0V; max. 2A
DO2	Digital Output; 24Vac Triac Switching to 0V; max. 2A
G	24Vac/dc Power Supply
Go	0V Common
Y1	0..10Vdc Analogue Output (Function Selectable)
Y2	0..10Vdc Analogue Output (Function Selectable)
Y3	0..10Vdc Analogue Output (Function Selectable)
Go	0V Common
A+	RS485 A+ Connection (BACnet)
B-	RS485 B- Connection (BACnet)

G0	0V Common
RI1	NTC10/Resistive Input 0..50kOhms or 0..10Vdc Analogue Input 1
DI1	Digital Input; Volt-Free, Max 25Hz, Min Pulse Length 20mS
RI2	NTC10/Resistive Input 0..50kOhms or 0..10Vdc Analogue Input 2
DI2	Digital Input; Volt-Free, Max 25Hz, Min Pulse Length 20mS

Wiring Precautions

Switch off the power before any wiring is carried out. If the sensor has the LCD display fitted, unplug the LCD display and then wire the power supply and analogue outputs, if relevant.

After the wiring has been completed; plug-in the display and power up the sensor.

Digital Input Pulse Counting

Digital Inputs can be used for pulse counting up to 25Hz, minimum pulse length 20mS. The pulse count is stored in a dedicated register and can be read over the network. It is possible to write to this register to reset the value.

NOTE: The pulse count value is not battery backed, and therefore the network master is required to manage the data synchronisation in case of power failure.

NTC10/Resistive Inputs

The resistive inputs can be configured to operate as NCT10 inputs or Resistive Inputs. As default the inputs are configured as NTC10. The maximum measurement range is -10°C to 100°C (-40°F to 212°F). The configuration is changed via the Configuration Software.

0-10Vdc Analogue Inputs; AI-Option

If AI-option has been selected then RI1 & RI2 are converted to 0-10Vdc Inputs to measure 0-10Vdc signals (resistive inputs are no longer available).

Y1/Y2/Y3 Analogue Output Operation (Modes)

The analogue outputs Y1/Y2/Y3 can be configured for the following options.

Output Modes	Description
Network	The output is set by the network (BACnet). On the Modbus network the actual value is configured through "Y1, Y2, Y3 Override Values" parameters, respectively.
CO ₂ Measurement (Default for Y1)	The output represents the CO ₂ measurement. This is scaled over 0..10V.
Temperature Measurement (Default for Y2)	The output represents the temperature measurement. This is scaled over 0..10V.
Humidity Measurement (requires -RH option)	The output represents the humidity measurement. This is scaled over 0..10V.
Light Measurement (requires -LL option)	The output represents the light level measurement. This is scaled over 0..10V.
CO ₂ Control	The output represents the CO ₂ control signal.
Temperature Control	The output represents the temperature control signal.
Humidity Control (requires -RH)	The output represents the humidity control signal.
Light Control (requires -LL)	The output represents the light level (LUX) control signal.
Maximum Control	The output represents the maximum of the CO ₂ and temperature control signals. Typically used in ventilation plants where the ventilation level is boosted based on high CO ₂ concentration or when high room temperature is prevailing (cooling).
Potentiometer (SP/SPB options)	Allows the setpoint potentiometer or push button setpoint position to be fed to the analogue output as 0..10V signal.
Max Hum/Temp	The output represents the maximum of the temperature and humidity control loops.
Max Hum/Temp/CO ₂	The output represents the maximum of the temperature, humidity and CO ₂ control loops.

DO1/DO2 Digital Output Modes

The DO1/DO2 digital outputs can be used to switch plants on/off based on a configured measurement and setpoint (thermostatic operation). If OC (Occupancy Sensor) option is fitted and then selected, the DO1/DO2 is used to switch output on when occupancy is detected. If the push button option (-PB) is fitted then DO1/DO2 can be set to switch ON when push button is pressed (delayed switch off).


Digital Output Mode Options	Description (Typical Operation)
Network	The DO1/DO2 is switched ON/OFF over the communication network.
CO2 Control Mode (e.g. CO2 High Limit Control)	Direct Mode: The DO1/DO2 is switched ON when the CO2 reading exceeds the CO2 Setpoint (1000 ppm default) + CO2 Digital Output Mode Hysteresis. The DO1/DO2 switches OFF when the CO2 reading drops below the setpoint. The control direction is adjustable; reverse / direct.
Temperature Control Mode (e.g. Low Temperature Limit)	Reverse Mode: The DO1/DO2 is switched ON when the temperature drops below the Temperature Setpoint - Temperature Mode Hysteresis. The output is switched OFF when the temperature exceeds the Setpoint. The control direction is adjustable; reverse (heating) / direct (cooling).
Humidity Control Mode (e.g. Humidity High Limit) (requires -RH option)	Direct Mode: The DO1/DO2 is switched ON when the humidity reading exceeds the Humidity Setpoint (60% default) + Humidity Digital Output Mode Hysteresis, and switches OFF when the humidity drops below the Setpoint. The control direction is adjustable; reverse (humidification) / direct (de-humidification).
Light Level Control (LUX) Mode (e.g. Low Light Level) (requires -LL option)	Reverse Mode: The DO1/DO2 is switched ON when the light level drops below the Light Level Setpoint - Light Level Digital Output Mode Hysteresis, and switches OFF when the level increases above Setpoint. The control direction is adjustable.
Occupancy (requires -LL option)	The DO1/DO2 is switched ON when the occupancy sensor detects occupancy; the output remains on adjustable time "Occupancy Delay Time Setting" plus approx 10 seconds after occupancy has been detected - not available on all models
Push Button 1/2/3/4 (requires -PB/-PB2/-PB3/-PB4 option)	If the relevant option is fitted, it is possible to have the DO1 (or DO2) on for the "Push Button Delay Time" specified in the settings after the pressing of button is detected.
Alarm Amber Threshold	The DO1/DO2 output is switched on at the Amber Alarm level.
Alarm Red Threshold	The DO1/DO2 output is switched on at the Red Alarm level.

CO2 Measurement Output Scaling and Single Point Calibration

The RCD measures the carbon dioxide content of the room space and the measurement can be sent to any of the analogue outputs (Y1/Y2/Y3). It is also available over BACnet.

This output is scaled as default 0% = 0ppm and 100% = 2,000ppm. The scaling can be modified through Maximum CO2 Scaling parameter.

Furthermore the CO2 measurement reading can be adjusted on site using the Single Point Calibration field.

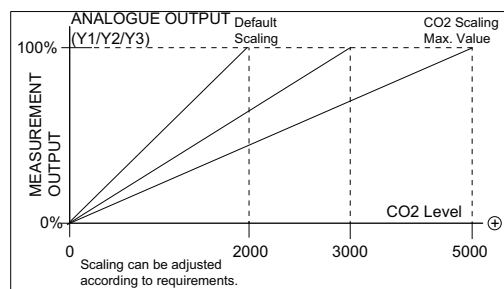

CO2 Measurement Auto-Calibration


The CO2 sensor has automatic auto-calibration feature. This feature monitors the background CO2 level over the calibration period (8 days), and calibrates the CO2 level to the lowest point measured during this period. The sensors are supplied as factory calibrated to the typical background levels. The auto calibration logic virtually eliminates the need for manual calibration in applications where the indoor CO2 drops to outside levels during unoccupied periods.

NOTE: If the CO2 sensor is fitted in spaces where the background level does not drop close to the typical background level (= fresh air) of 400ppm (e.g. greenhouses) it is essential that the auto-calibration feature is disabled during the commissioning.

Temperature Measurement Output Scaling and Single Point Calibration

The RCD measures the room space temperature, and the measurement can be sent to any of the analogue outputs (Y1/Y2/Y3). It is also available over BACnet.

This output is scaled as default 0% = 0°C and 100% = 50°C). The scaling can be modified through Maximum Temperature Scaling parameter. The output can also be scaled in Fahrenheit units.

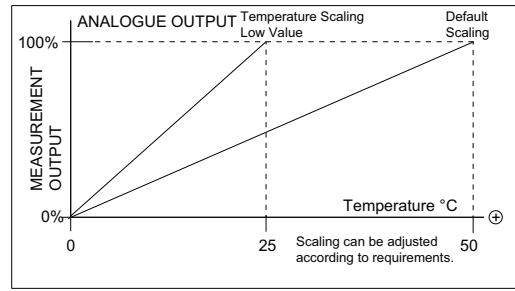


Furthermore the temperature measurement reading can be adjusted on site using the Single Point Calibration field.

Humidity Measurement Output Scaling and Single Point Calibration; Only when -RH Option Fitted

The RCD with -RH option measures the room space humidity. The humidity reading is available over the network (BACnet version), and the measurement can be sent to any of the analogue outputs (Y1/Y2/Y3).

This output is scaled as default 0% = 0°C and 100% = 100%rH). The scaling can be modified through Maximum Humidity Scaling parameter.

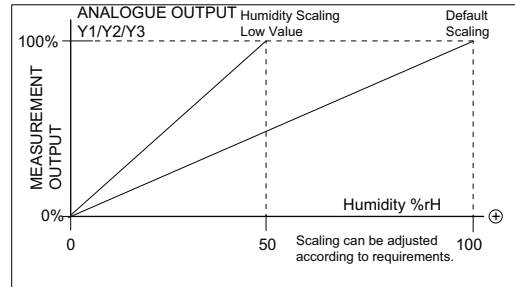


Furthermore the humidity measurement reading can be adjusted on site using the Single Point Calibration field.

Light Level Measurement Output Scaling; Only when -LL Option Fitted

The RCD sensors fitted with -LL option measure the light level. The light level (LUX) reading is available over the network, and the measurement can be sent to any of the analogue outputs (Y1/Y2/Y3).


This output is scaled as default 0% = 0 LUX and 100% = 3,000 LUX). The scaling can be modified through Maximum LUX Scaling parameter.

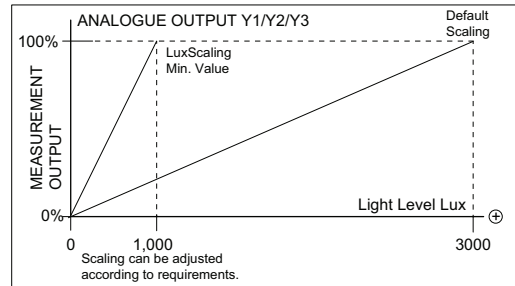

ENERGY SAVING FEATURE: When the LL option is combined with the SPB (Setpoint by buttons) option, it is possible to configure the control setpoint to automatically switch to setback/boost value when the room space is not occupied.

Occupancy Sensor (-LL Option)

The LL option offers a low power Passive Infrared Motion sensor with 21mm Fresnel lens designed for HVAC ventilation and lighting control applications. The sensor detects human body within its detection range. The LL sensor employs a dual element pyroelectric infrared sensor with advanced electronics circuitry.

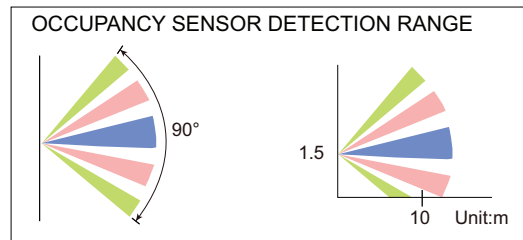


CO2 Control Loop Operation

Proportional or PI Control (Reverse/ Direct)

The CO2 measurement can be used for the CO2 control. The calculated control demand is then send to the output Y1, Y2 or Y3 (depending on the corresponding analogue output mode selection).

The CO2 control loop output corresponds to the CO2 setpoint and the CO2 proportional band. If configured as Direct Control (typical), then if the CO2 level increases above the setpoint the loop output starts to modulate to 100%. When the CO2 level is the amount of the Proportional Band above the setpoint the loop output is 100%. The configuration is done via the configuration parameters (or over the BACnet network). The CO2 control loop can also be configured to operate as Proportional + Integral control by changing the Integral Action Time from 0 to a required value.

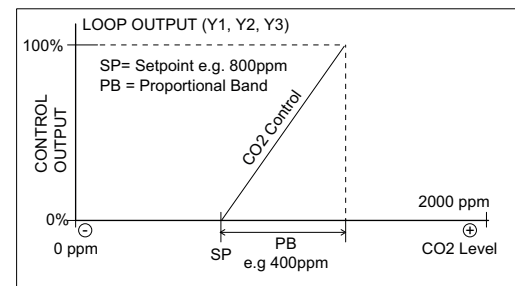


It is possible apply the Boost function to the control loop to override the output to 100% (see Boost Function for more details).

Temperature Control Loop Operation

Proportional or PI Control (Reverse/ Direct)

The temperature measurement can also be used for the temperature control. The calculated control demand is then send to the output Y1, Y2 or Y3 (depending on the corresponding analogue output mode selection).

The temperature control loop output corresponds to the temperature setpoint and the temperature proportional band. If configured as Reverse Control (heating), then if the temperature level drops below the setpoint the loop output starts to modulate to 100%. When the temperature is the amount of the Proportional Band below the setpoint the loop output is 100%. In the Direct Control mode the output modulates in reverse. The configuration is done via the configuration parameters using Device Configuration Tool or over the BACnet network.

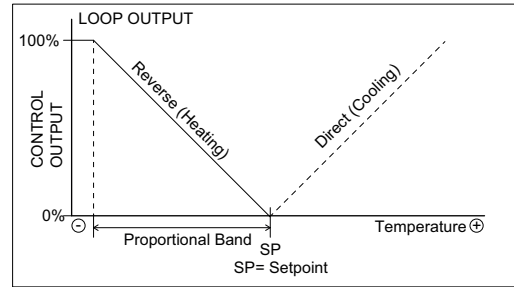

The temperature control loop can also be configured to operate as Proportional + Integral control by changing the Integral Action Time from 0 to a required value.


It is possible apply the Boost function to the control loop to override the output to 100% (see Boost Function for more details).

Humidity Control Loop Operation Mode Selection; Only with RCD-BAC-RH

Proportional or Proportional + Integral Control (Reverse/ Direct)

The humidity measurement can also be used for the humidity control. The calculated control demand is then send to the output Y1, Y2 or Y3 (depending on the corresponding analogue output mode selection).

The humidity control loop output corresponds to the humidity setpoint and the humidity proportional band. If configured as Reverse Control (humidification), then if the humidity level drops below the setpoint the loop output starts to modulate to 100%. When the humidity is the amount of the Proportional Band below the setpoint the loop output is 100%. In the Direct Control mode the output modulates in reverse. The configuration is done via the configuration parameters (or over the BACnet network).

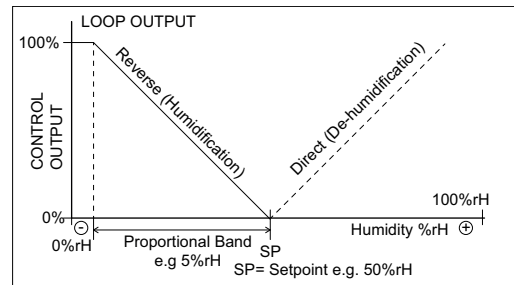

The humidity control loop can also be configured to operate as Proportional + Integral control by changing the Integral Action Time from 0 to a required value.


It is possible apply the Boost function to the control loop to override the output to 100% (see Boost Function for more details).

Light Level (LUX) Control Loop Operation; Only when -LL Option Fitted

Proportional Control (Reverse/ Direct)

The LUX measurement can also be used for the light control. The calculated control demand is sent to the output Y1, Y2 or Y3 (depending on the corresponding analogue output mode selection).

The light control loop output corresponds to the light level setpoint and the light control proportional band. If configured as Reverse Control, then if the light level drops below the setpoint the loop output starts to modulate to 100%. When the light level is the amount of the Proportional Band below the setpoint the loop output is 100%. In the Direct Control mode the output modulates in reverse. The configuration is done via the configuration parameters (or over BACnet network).

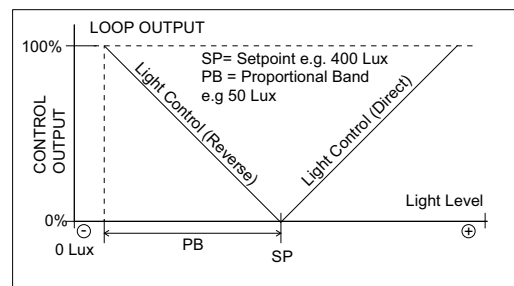

The LUX control loop can also be configured to operate as Proportional + Integral control by changing the Integral Action Time from 0 to a required value.

It is possible apply the Boost function to the control loop to override the output to 100% (see Boost Function for more details).

Unoccupied Setpoint

If the sensor has been configured for control, then it is possible to set the control setpoint to a different setting during the unoccupied periods (controlled by the occupancy sensor). Great feature for energy savings.

Maximum Control Loops

Each of the analogue outputs can also be configured as "Maximum Control". In this case the corresponding output (Y1, Y2, Y2) takes the maximum of the CO2 Loop and Temperature Loop outputs. This is typically used in demand based ventilation.

Furthermore the each analogue output can be configured as "Max Hum/Temp" or "Max Hum/Temp/CO2", in which case the maximum of these control loops is taken.

Boost Function

It is possible to boost/override the control output to 100%. This can be achieved via a push button on the device (PB-options) or via a digital input. If the Push Button is used then the control output is boosted to 100% for the amount of Push Button Delay Time. When the boost is active the Blue Push Button backlight is lit. The boost can be cancelled by pressing the push button again.

When the digital input option is selected, the output is boosted to 100% when the input is closed. When the digital input is opened the output remains 100% for the time set in the parameter Digital Input Off Delay.

Push Buttons

It is possible to fit up to four push buttons (or up to two if -SPB push button setpoint option is fitted). The push buttons can be used to activate the boost as described in Boost Function section, or used as a network user interface. The push button LED is as default controlled by the internal application i.e. the LED is ON when the push button timer is active. The push button timer can be cancelled by pressing the push button again when active.

If the Push Button LED Mode is set to BMS, then the LED can be controlled by the BMS. In typical application, when the user presses the push button, the internal timer starts, and the BMS reads the push button status. When the push button status has been confirmed by the BMS, the BMS switches the corresponding PB LED ON and therefore sending acknowledgement to the user. It is not possible to reset the push button timer in network mode by pressing the button again.


Note: If -SPB option is fitted Push Button 1 and Push Button 2 become as setpoint adjustment buttons. PB option activates Push Button 3 and PB2 option activates Push Button 3 and 4.

Note: It is possible to print the push button caps with custom legends. Please contact Produal Sales for further details.

Digital Output DO1/DO2 Control Modes

The digital outputs DO1 or DO2 can be configured to work in any of the control modes; CO2 Control, Temperature Control; Humidity Control or LUX control; the corresponding digital output is switched ON/OFF based on the corresponding Setpoint property and the corresponding hysteresis. The direction of the operation is also adjustable through Control Loop Operating Mode Parameter.

The diagram below illustrates the operation for Temperature Control Mode. The same concept is applicable for any of the DO1/DO2 control modes (CO2, Temperature, Humidity, LUX).

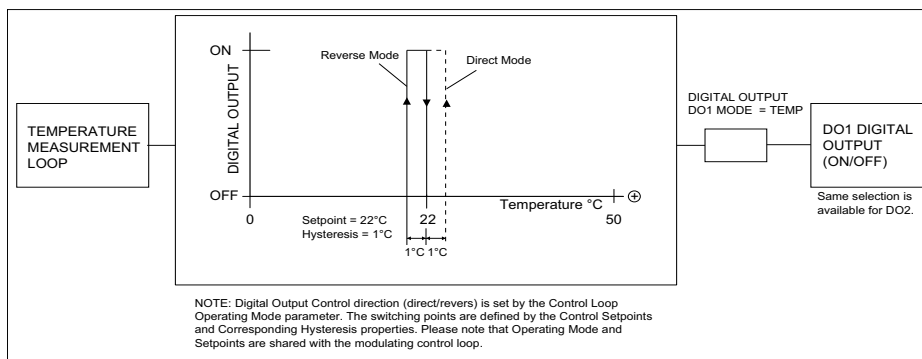


Alarm LED / LCD Operation (-AL and -LCD Options)

If the -AL or -LCD option is fitted the transmitter can be configured to monitor the CO₂, temperature, humidity or light levels for alarms. The -AL option comes with three traffic light LEDs (green/amber/red). When -LCD option is fitted the alarm condition is displayed using the backlight colours of the LCD instead of LEDs.

In both cases if the measurement exceeds the amber alarm limit then the amber LED / Backlight is switched ON. If the measurement exceeds the red alarm limit, the red LED / Backlight is switched ON. At normal condition green LED or white backlight is displayed. The alarm mode has an adjustable hysteresis to prevent the LEDs / Backlight flickering and all alarm limits are adjustable. The alarm condition is also available over the BACnet. The configuration is done via the configuration parameters (or over the BACnet).

Note: The DO1/DO2 outputs can also be configured to activate on Amber or Amber/Red alarm e.g to drive external devices in case of the alarm limit has been exceeded.

Setpoint Potentiometer Knob (-SP option) or Setpoint with Push Buttons (-SPB option)

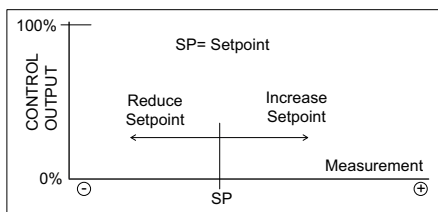

With setpoint options it is possible to adjust the current control setpoint. The setpoint potentiometer knob option provides rotary knob for the setpoint whereas the SPB option provides two push buttons for setpoint. The adjustment shifts the CO2, temperature, humidity or LUX setpoint up or down depending on the configuration parameter settings up to the minimum and

maximum allowable setpoints. The setpoint can also be made only to be available as a network parameter (no influence to control). In this case the value displayed is between the minimum and the maximum settings (e.g -5.0 to +5.0).

It is also possible to send the setpoint potentiometer position (-SP option) or Setpoint Push Button Setting (-SPB option) to an analogue output as 0..10V signal.


When SPB option is used, by writing the setpoint over the network resets the user adjustments to 0 if the "Reset SPA on SP Change" property is enabled (default). If "Reset SPA on SP Change" is disabled, then writing the setpoint over the network will not reset the user adjustment. In this case "Reset SPA" network variable can be used to reset the user adjustment to zero. Enabling "Save SPA" option will store the user adjustment to the non-volatile memory.

When using -SPB option it is also possible to adjust the setpoint adjustment steps between 0.1/0.5/1.0 °C/°F. If option 0.1 has been selected and the button is kept pressed, the adjustment speed accelerates automatically.

Note: SPB option requires also -LCD option to be selected/fitted.

Display (Requires Option -LCD)

The LCD display shows the temperature, humidity, CO2 and LUX readings. CO2, temperature and LUX readings are primary readings displayed on the "top line". These readings can be rotated. The humidity reading is shown on the "bottom line" if -RH option has been fitted. The display has white backlight which is as default switched off. The backlight can be switched on and its intensity can be adjusted.

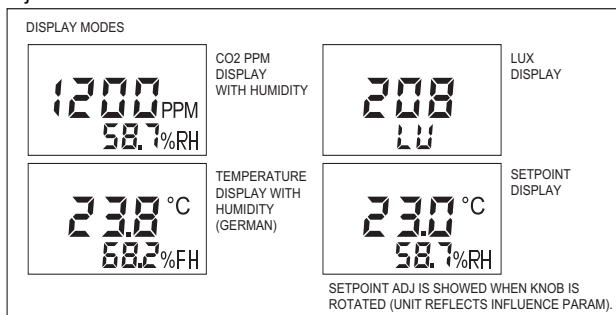


Note: The backlight is permanently on if activated. At 50% intensity the backlight lifetime is approx 10,000 hours. After this time the LCD module needs replacing if the backlight is required. The display continues to operate without the backlight.

Configuration Parameters and Programming

The parameter options can be configured using the Device Configuration Tool software; or via the BACnet network using proprietary properties (see the BACnet parameter section).


If the Device Configuration software is used, this is connected via the PC USB cable to the programming header of the transmitter. Plug-in the USB cable to the programming header as shown on the image below.

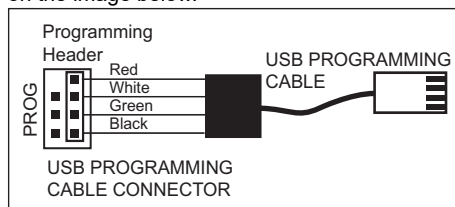

The correct process for connecting the sensor via the USB is as follows:

- Disconnect USB Connector from PC
- Disconnect the Sensor from Power
- Plug-In the 4-Way Connector to the Sensor
- Connect the USB to the PC
- Power Up the Sensor

NOTE: Always disconnect USB from PC before plugging the cable into the sensor.

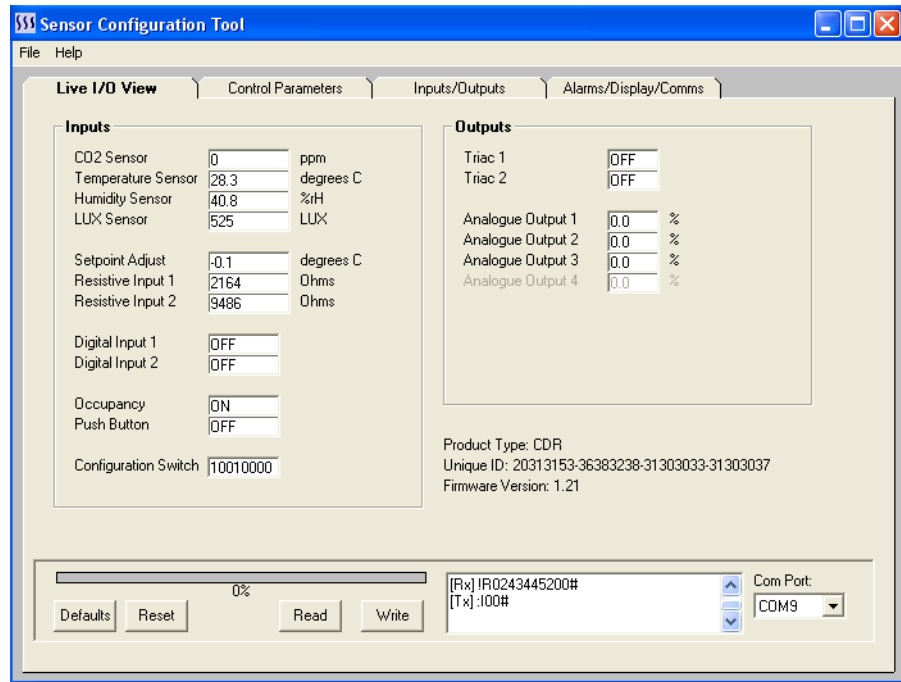

Common Parameters	
Parameter Name	Description
Defaults	Reloads the default configuration from the sensor non-volatile memory. Note: All modified settings are lost.
Reset	Performs soft reset of the sensor. Apply after major changes.
Read	Reads the sensor data.
Write	Writes the new settings to the sensor (automatically stored in the non-volatile memory)
COM Port	Select the COM port for the USB Cable. The USB cable driver must be installed in order the Serial to TTL connection to operate.

Live IO-View		
Parameter Name	Description	Range
INPUTS		
CO2 Sensor	CO2 Sensor Reading	0..5,000ppm
Temperature Sensor	Temperature Sensor Reading	0..50°C (32..122°F)
Humidity Sensor	Humidity Sensor Reading	0..100% rH
LUX Sensor	LUX Sensor Reading	0..3,000 LUX
Setpoint Adjust	Setpoint Adjuster Reading	-500..+500
Resistive Input 1	Resistive Input 1 Reading	0..50kOhms
Resistive Input 2	Resistive Input 2 Reading	0..50kOhms
Analogue Input 1	Analogue Voltage Input (with AI-Option Only)	0..100%
Analogue Input 2	Analogue Voltage Input (with AI-Option Only)	0..100%
Digital Input 1	Digital Input 1 Status	Off - On
Digital Input 2	Digital Input 2 Status	Off - On
Digital Input 3	Digital Input 3 Status (RI1)	Off - On
Digital Input 4	Digital Input 4 Status (RI2)	Off - On
Occupancy	Occupancy Status	Off - On
Push Button 1	Push Button 1 Status	Off - On
Push Button 2	Push Button 2 Status	Off - On
Push Button 3	Push Button 3 Status	Off - On
Push Button 4	Push Button 4 Status	Off - On
Configuration Switch	Bit Switch Status for Each Switch	00000000 - 11111111
OUTPUTS		
Triac 1	Digital Output 1	Off - On

Live IO-View		
Parameter Name	Description	Range
Triac 2	Digital Output 2	Off - On
Analogue Output 1	Analogue Output 1	0..100%
Analogue Output 2	Analogue Output 2	0..100%
Analogue Output 3	Analogue Output 3	0..100%

Control Parameters		
Parameter Name	Description	Range

TEMPERATURE

Temperature Loop Operating Mode	Direction of the temperature control loop.	0 = Reverse Control (Heating) 1 = Direct Control (Cooling)
Temperature Control Setpoint	Temperature Setpoint	0.0...150.0°C/°F (Default 20°C)
Temperature Proportional Band	Temperature Proportional Band	1.0...150.0°C/°F (Default 50°C)
Temperature Control Integral Action	Integral Action time of the temperature control loop. Set to 0 to disable.	0..10,000 seconds (Default 0s)
Temperature Digital Output Mode Hysteresis	Hysteresis for the digital output temperature control function.	0.1...150.0°C/°F (Default 2°C)
Temperature Loop Boost Input	Boosts the Control Output to 100%	Select Push Button 1/2/3/4 or Digital Input 1/2.

HUMIDITY

Humidity Loop Operating Mode	Direction of the humidity control loop.	0 = Reverse Control (Humidification) 1 = Direct Control (De-humidification)
Humidity Control Setpoint	Humidity Setpoint	0.0...100.0 %rH (Default 50%)
Humidity Proportional Band	Humidity Proportional Band	0.1...100.0 %rH (Default 20.0%)
Humidity Control Integral Action	Integral Action time of the humidity control loop. Set to 0 to disable.	0..10,000 seconds (Default 0s)
Humidity Digital Output Mode Hysteresis	Hysteresis for the digital output humidity control function.	1.0...100.0 %rH (Default 5.0%)
Humidity Loop Boost Input	Boosts the Control Output to 100%	Select Push Button 1/2/3/4 or Digital Input 1/2.

AIR QUALITY (CO2 Operation)

Air Quality Operating Mode	Direction of the Air Quality control loop.	0 = Reverse Control 1 = Direct Control (default)
Source	Air Quality Control Loop Source	0 = CO2 Sensor (default)
Setpoint	Air Quality Control Setpoint	0..3250ppm (Default 1,000 ppm)
Proportional Band	Air Quality Control Proportional Band	10..5000 ppm (Default = 300 ppm)
Integral Action Time	Integral Action time of the Air Quality Control loop. Set to 0 to disable.	0..10,000 seconds (Default 0)
DO Hysteresis	Hysteresis for the digital output with Air Quality Control.	10..5000ppm (Default 100 ppm)
Boost Input	Boosts the Control Output to 100%	Select Push Button 1/2/3/4 or Digital Input 1/2.

LUX

Lux Loop Operating Mode	Direction of the LUX control loop.	0 = Reverse Control 1 = Direct Control
Lux Control Setpoint	LUX Setpoint	0..3,000 Lux (Default 400 Lux)
LUX Proportional Band	LUX Proportional Band	1..3,000 Lux (Default 400 Lux)
LUX Control Integral Action	Integral Action time of the LUX control loop. Set to 0 to disable.	0..10,000 seconds (Default 0s)
LUX Digital Output Mode Hysteresis	Hysteresis for the digital output LUX control function.	1..3,000 Lux (Default 100 Lux)
LUX Loop Boost Input	Boosts the Control Output to 100%	Select Push Button 1/2/3/4 or Digital Input 1/2.

SETPOINT ADJUST

Setpoint Adjuster Minimum Value	Sets the minimum value for the setpoint (setpoint turned fully anti clockwise)	-500..0 (Default -3.0)
Setpoint Adjuster Maximum Value	Sets the maximum value for the setpoint (setpoint turned fully clockwise)	0..500 (Default 3.0)

Control Parameters		
Parameter Name	Description	Range
Setpoint Value Influence to Control Setpoint	Setpoint Value Influence to Control Setpoint	0 = No Influence (network value) 1 = CO2 Loop 2 = Temperature Loop 3 = Humidity Loop 4 = Lux Loop
SPA Step Size	Setpoint Adjustment Steps (only with -SPB and only affects temperature setpoint)	0 = 0.1°C/°F (default) 1 = 0.5°C/°F 1 = 1°C/°F
Unoccupied SPA	Changes the control setpoint to the set value when the space is unoccupied (requires -LL option)	0..500 (Default 0.0)
Save SPA	Saves User Setpoint (Setpoint Adjustment) changes to non-volatile after changes have been completed.	0 = Disabled (Default) 1 = Enabled
Reset SPA on SP Change	Resets the User Setpoint Adjustment (SPA), when the setpoint is written over the network.	0 = Disabled 1 = Enabled (Default)

Inputs / Outputs		
Parameter Name	Description	Range
SENSOR INPUTS		
CO2 Offset	One Point CO2 Calibration Field	-200..+200ppm (Default 0ppm)
CO2 AO Scale	Analogue Output Maximum CO2 Scaling	1000..5000 ppm (Default = 2,000 ppm)
Temperature Offset	One Point Temperature Calibration Field	-3.0..+3.0°C/°K (Default 0°C)
Temperature AO Scale	Analogue Output Maximum Temperature Scaling	0.1...150.0°C/°F (Default 50°C)
Humidity Offset	One Point Humidity Calibration Field	-5.0..+5.0 %rH (Default 0 %rH)
Humidity AO Scale	Analogue Output Humidity Maximum Scaling	0.1...100.0 %rH (Default 100.0%)
LUX AO Scale	Analogue Output Maximum Lux Scaling	1000..3,000 Lux (Default 3,000 Lux)
Occupancy Off Delay	Delay Time Setting for Occupancy	1..7200 Seconds (Default 600s)
Push Button Off Delay	Delay Time Setting for Push Button	1..28,800 Seconds (Default 600s)
Push Button 1 Mode	Push Button 1 LED Mode	0 = Local (default) 1 = BMS
Push Button 2 Mode	Push Button 2 LED Mode	
Push Button 3 Mode	Push Button 3 LED Mode	
Push Button 4 Mode	Push Button 4 LED Mode	
DI1 Off Delay	Delay Time Setting for Digital Input 1	0..28,800 Seconds (Default 0s)
DI2 Off Delay	Delay Time Setting for Digital Input 2	0..28,800 Seconds (Default 0s)
OUTPUTS		
AO1 (Y1)	Analogue Output Y1 Mode Default: 1 = CO2 Sensor	0 = Network Value 1 = CO2 Measurement 2 = Temperature Measurement 3 = Humidity Measurement 4 = Light Measurement (LUX) 5 = CO2 Control 6 = Temperature Control 7 = Humidity Control 8 = Light Control (LUX) 9 = Maximum Control 10 = Potentiometer 11 = Max Hum/Temp Control 12 = Max Hum/Temp/CO2 Control
AO2 (Y2)	Analogue Output Y2 Mode Default 2 = Temperature Sensor	
AO3 (Y3)	Analogue Output Y3 Mode Default: 3 = Humidity Sensor	

Inputs / Outputs		
Parameter Name	Description	Range
DO1	Digital Output 1 Mode Default: 6 = Push Button 1	0 = Network Value 1 = CO2 Relay 2 = Temperature Relay 3 = Humidity Relay 4 = Light Relay (LUX) 5 = Occupancy Relay 6 = Push Button 1 (PB1 Option) 7 = Push Button 2 (PB2 Option) 8 = Push Button 3 (PB3 Option) 9 = Push Button 4 (PB4 Option) 10 = Alarm Amber Threshold 11 = Alarm Red Threshold
DO2	Digital Output 2 Mode Default: 5 = Occupancy	

Alarm/Display/Comms		
Parameter Name	Description	Range
ALARMS		
Alarm Source	Alarm LED Mode	0 = Air Quality - CO2 (default) 1 = Temperature 2 = Humidity 3 = LUX
Alarm Amber Threshold	Amber Alarm LED Switching Point	0..5000 (Default 750)
Alarm Red Threshold	Red Alarm LED Switching Point	0..5000 (Default 1250)
Alarm Hysteresis	Alarm LED Hysteresis	0..5000 (Default 50)
DISPLAY		
Temperature Units	Temperature Unit Selection	0 = Celsius 1 = Fahrenheit
Language	Language Selection (for display rH vs FH)	0 = English (default) 1 = German
Display Mode	Display Mode	0 = Rotate Installed 1 = CO2 Only 2 = Temperature Only 3 = LUX Only 4 = Setpoint Only
LCD brightness	Brightness of the LCD	Off - 10% to 100%
COMMS		
BACnet Baud Rate	BACnet Baud Rate (can only be set if BR1 and BR2 are in OFF position)	0 = 9600 (Default) 1 = 19200 2 = 38400 3 = 76800
BACnet Parity	BACnet Parity	None (fixed)
Stop Bits	Stop Bits	1 (fixed)
Address	BACnet Address (can only be set if all address bit switches are in OFF position)	0..247 (Default 1)
Device ID	The BACnet Device ID. Change the value as required and activate the change by setting the MAC address via bit switches or by Reset Button.	0..4,194,303 Default 783+MAC Address


Parameter Storage

The configuration parameters are stored in the non-volatile memory. The Device Configuration Tool software will automatically store the register values on the non-volatile permanent memory after the changes are carried out. If the changes are carried out over the BACnet network, then "NonVol Update" flag is required to be forced on to save the changes. The parameter returns automatically to the off state once the values have been stored.

Setting Up BACnet Address and Baud Rate

The RCD BACnet address and the baud rate is normally set through the bit switch. It is also possible to set the address and baud rate over the configuration tool or over the BACnet communication network.

NOTE: The new settings are activated automatically after approx 5 seconds if the bit switch positions have not been moved. In this case the controller reset is applied to activate the new settings. .

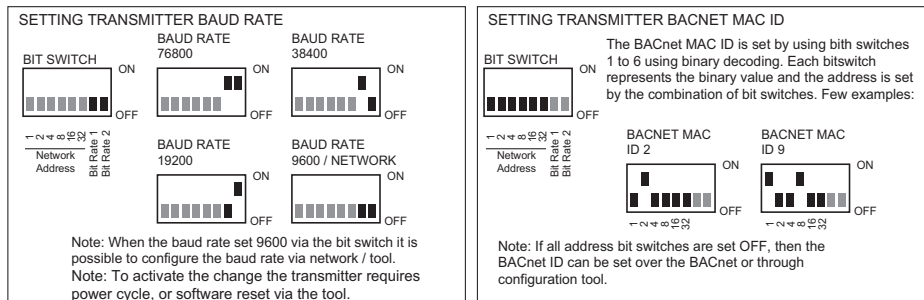

BACnet Interoperability Building Blocks Supported (Annex K)

Application Service	Initiate	Execute	BIBB
ReadProperty		Yes	DS-RP-B
ReadPropertyMultiple		Yes	DS-RPM-B
WriteProperty		Yes	DS-WP-B
ReinitializeDevice		Yes	
Who-Is		Yes	DM-DDB-B
I-Am	Yes		
Who-Has		Yes	DM-DOB-B
I-Have	Yes		
DeviceCommunicationControl		Yes	DM-DCC-B

BACnet Standard Object Types Supported

No dynamic Creation or Deletion supported. Objects, and object instances, are assigned to fixed functions within the proprietary control application of the product as follows:

Object	Number Of Instances	Instance Assignments
Device Object	1	
Analog Input	7	AI(0) – Temperature Sensor AI(1) – Calculated Setpoint AI(2) – Humidity Sensor AI(3) – R1 / AI1 AI(4) – R12 / AI2 AI(5) – CO2 Sensor AI(6) – LUX Sensor
Analog Outputs	3	AO(0) – Y1 Output AO(1) – Y2 Output AO(2) – Y3 Output
Analogue Value	9	AV(0) – Temperature Setpoint AV(1) – Humidity Setpoint AV(2) – CO2 Setpoint AV(3) – LUX Setpoint AV(4) – DI1 Pulse Count AV(5) – DI2 Pulse Count AV(6) - LCD Backlight Brightness AV(7) - Amber Alarm Threshold AV(8) - Red Alarm Threshold
Binary Input	7	BI(0) – DI1 input BI(1) – DI2 Input BI(2) – Occupancy BI(3) – Push Button 1 BI(4) – Push Button 2 BI(5) – Push Button 3 (Third button) BI(6) – Push Button 4 (Fourth Button)

Object	Number Of Instances	Instance Assignments
Binary Output	9	BO(0) – DO1 Output BO(1) – DO2 Output BO(2) - SPA Reset (Only with -SPB) BO(3) - PB1_LED BO(4) - PB2_LED BO(5) - PB3_LED BO(6) - PB4_LED BO(7) - Not Applicable BO(8) - NonVol Update
MutliState Input	1	MSI(0) - Alarm Level

**Device Object Properties
(Required Object Properties)**

Property Name /ID	Attributes	Range	Default
Object Identifier	R/W		MAC_Address + 783000 (Adjustable)
Object Name	R/W	32 Characters Max	Concatenation of product type and MAC address i.e. "RCD_001"
Object Type	R		8
System Status	R		STATUS_OPERATIONAL
Vendor Name	R		Produal
Vendor Identifier			783
Model Name	R		URD
Protocol Version	R		1
Protocol Revision	R		10
Max APDU Length	R		480
Segmentation Support	R		No
APDU Timeout	R		3000 ms
Number APDU Retries	R		3
MaxMaster	R		127
Max_Info_Frames	R		1
Database Revision	R		0

Analogue Input Objects

	Property Name /ID	Attributes	Range	Default
Required Object Properties	Object Identifier	R		
	Object Name	R		AI(0) – Temperature Sensor AI(1) – Setpoint Adjust AI(2) – Humidity Sensor AI(3) – RI1 / AI1 AI(4) – RI2 / AI2 AI(5) – C02 Sensor AI(6) – LUX Sensor
	Object Type	R		0
	Present Value	R/W	AI(0): 0..150 AI(1): -500 ..500 AI(2): 0..100 AI(3): 0..50000 AI(4): 0..50000 AI(5): 0..5000 AI(6): 0..3000	
	Status Flag	R		
	Event State	R		
	Out-Of-Service	R/W		FALSE
	Units	R		AI(0): UNITS_DEGREES_CELCIUS or UNITS_DEGREES_FAHRENHEIT AI(1): UNITS_DEGREES_CELCIUS or UNITS_DEGREES_FAHRENHEIT AI(2): UNITS_PERCENT AI(3): UNITS_OHMS/UNITS_PERCENT AI(4): UNITS_OHMS/UNITS_PERCENT AI(5): UNITS_PARTS_PER_MILLION AI(6): UNITS_LUXES
Optional Properties	None			
Proprietary Properties	None			

Analogue Output Objects

	Property Name /ID	Attributes	Range	Default
Required Object Properties	Object Identifier	R		
	Object Name	R		AO(0) = "Y1" AO(1) = "Y2" AO(2) = "Y3"
	Object Type	R		1
	Present Value	R/W	0..100	
	Status Flag	R		
	Event State	R		
	Out-Of-Service	R/W		FALSE
	Units	R		UNITS_PERCENT
Optional Properties	None			
Proprietary Properties	None			

:

Analogue Value Objects

	Property Name /ID	Attributes	Range	Default
Required Object Properties	Object Identifier	R		
	Object Name	R		AV(0) – Temperature Setpoint AV(1) – Humidity Setpoint AV(2) – CO2 Setpoint AV(3) – LUX Setpoint AV(4) - DI1 Pulse Count AV(5) - DI2 Pulse Count AV(6) - LCD Backlight Brightness AV(7) - Amber Alarm Threshold AV(8) - Red Alarm Threshold
	Object Type	R		2
	Present Value	R/W	AV(0): 0..150 AV(1): 0..100 AV(2): 0..5000 AV(3): 0..3000 AV(4): 0..4278190080 AV(5): 0..4278190080 AV(6): 0..10 AV(7): 0..5000 AV(8): 0..5000	
	Status Flag	R		
	Event State	R		
	Out-Of-Service	R/W		FALSE
	Units	R		AV(0) = UNITS_DEGREES_CELSIUS or UNITS_DEGREES_FAHRENHEIT AV(1) = UNITS_PERCENT AV(2) = "UNITS_PARTS_PER_MILLION AV(3) = UNITS_LUXES AV(4) = NO_UNITS AV(5) = NO_UNITS AV(6) = NO_UNITS AV(7) = NO_UNITS AV(8) = NO_UNITS
	Priority Array	R		
	Relinquish Default	R/W		AV(0) = Nonvol Temperature Setpoint AV(1) = Nonvol HumiditySetpoint AV(2) = Nonvol CO2 Setpoint AV(3) = Nonvol LUX Setpoint AV(4) = 0 AV(5) = 0 AV(6) = 0
Optional Properties	None			
Proprietary Properties	None			

Binary Input Objects

	Property Name /ID	Attributes	Range	Default
Required Object Properties	Object Identifier	R		
	Object Name	R		BI(0) = "DI1" BI(1) = "DI2" BI(2) = "Occupancy" BI(3) = "Push Button 1" BI(4) = "Push Button 2" BI(5) = "Push Button 3" = PB Option when SPB fitted BI(6) = "Push Button 4" = PB2 Option Second Button when SPB fitted
	Object Type	R		3
	Present Value	R/W	0..1	
	Status Flags	R		
	Event State	R		
	Out-Of-Service	R/W		FALSE
	Polarity	R/W		POLARITY_NORMAL
Active Text	R		"on"	
Inactive Text	R		"off"	
Optional Properties	None			
Proprietary Properties	None			

Binary Output Objects

	Property Name /ID	Attributes	Range	Default
Required Object Properties	Object Identifier	R		
	Object Name	R		BO(0) = "DO1" BO(1) = "DO2" BO(2) = "SPA Reset"*1 BO(3) = "PB1_LED"*2* BO(4) = "PB2_LED"*2* BO(5) = "PB3_LED"*2* BO(6) = "PB4_LED"*2* BO(7) - Not Applicable BO(8) - NonVol Update
	Object Type	R		4
	Present Value	R/W	0..1	
	Status Flags	R		
	Event State	R		
	Out-Of-Service	R/W		FALSE
	Polarity	R/W		POLARITY_NORMAL
	Priority Array	R		
	Relinquish Default	R/W		BINARY_INACTIVE
Active Text	R		"on"	
Inactive Text	R		"off"	
Optional Properties	None			
Proprietary Properties	None			

Note 1: Setting "SPA Reset" to true, disables the user setpoint adjustment. Only available with -SPB option.

Note 2: Set "Push Button Mode" to BMS in order to be able to control push button LEDs. When PBx_LED is set to 'off' the Push Button timer is reset. PBx_LED has to be set to 'null' in order to be able to re-trigger the push button.password

Multi-State Input Objects

	Property Name /ID	Attributes	Range	Default
Required Object Properties	Object Identifier	R		
	Object Name	R		"Alarm Level"
	Object Type	R		13
	Present Value	R/W	1,2,3 (Green, Amber, Red)	
	Status Flags	R		
	Event State	R		
	Out-Of-Service	R/W		FALSE
	Number-Of-States	R		3
Optional Properties	None			
Proprietary Properties	None			

Proprietary Object Types

No dynamic Creation or Deletion supported

Object	Number Of Instances	Instance Assignments
Application Configuration Object	1	Provides a container for all the proprietary application specific properties. Proprietary Property Id's within the object have been deliberately chosen to correspond to the equivalent Modbus register addresses for this product.

App_Config Object

	Property Name /ID	Attributes	Range	Default
Required Object Properties	Object Identifier	R		proprietary-128
	Object Name	R/W		"App_Config1"
	Object Type	R		proprietary-128
Optional Properties	None			

	Property ID	Description	BACnet Data Type	Range
Proprietary Properties	40004 Default: CO2 Sensor	Analogue Output Y1 Mode	Unsigned	0 = Network Value 1 = CO2 Measurement (Default) 2 = Temperature Measurement 3 = Humidity Measurement 4 = Light Measurement 5 = CO2 Control 6 = Temperature Control 7 = Humidity Control 8 = Light Control 9 = Maximum Control 10 = Potentiometer 11 = Max Hum/Temp Control 12 = Max Hum/Temp/CO2 Control
	40005 Default: Temperature Sensor	Analogue Output Y2 Mode	Unsigned	
	40006 Default: Humidity Sensor	Analogue Output Y3 Mode	Unsigned	
	40007	AO4 Mode (Reserved for future use)	Unsigned	
	40008 Default: Push Button 1	Digital Output 1 Mode	Unsigned	0 = Network Value 1 = CO2 Relay 2 = Temperature Relay 3 = Humidity Relay 4 = Light Relay (LUX) 5 = Occupancy Relay 6 = Push Button 1 (PB1/2 Option) 7 = Push Button 2 (PB2 Option) 8 = Push Button 3 (PB3 Option) 9 = Push Button 4 (PB4 Option) 10 = Alarm Amber Threshold 11 = Alarm Red Threshold
	40009 Default: Occupancy Relay	Digital Output 2 Mode	Unsigned	

40010	CO2 Control Setpoint	Unsigned	0..5000ppm (Default 1,000 ppm)
40011	CO2 Proportional Band	Unsigned	10..5000 ppm (Default = 300 ppm)
40012	CO2 Control Integral Action	Unsigned	0..10,000 seconds
40013	CO2 Loop Operating Mode	Unsigned	0 = Reverse Control 1 = Direct Control
40014	CO2 Digital Output Mode Hysteresis	Unsigned	10..5000ppm (Default 100 ppm)
40015	Temperature Control Setpoint	Unsigned	0.0...150.0°C/°F (Default 20°C)
40016	Temperature Proportional Band	Unsigned	0.1...150.0°C/°F (Default 50°C)
40017	Temperature Control Integral Action	Unsigned	0..10,000 seconds
40018	Temperature Loop Operating Mode	Unsigned	0 = Reverse Control (Heating) 1 = Direct Control (Cooling)
40019	Temperature Digital Output Mode Hysteresis	Unsigned	0.1...150.0°C/°F (Default 2°C)
40020	Humidity Control Setpoint	REAL	0.0...100.0 %rH (Default 50%)
40021	Humidity Proportional Band	REAL	0.1...100.0 %rH (Default 20.0%)
40022	Humidity Control Integral Action	Unsigned	0..10,000 seconds
40023	Humidity Loop Operating Mode	Unsigned	0 = Reverse Control (Humidification) 1 = Direct Control (De-humidification)
40024	Humidity Digital Output Mode Hysteresis	Unsigned	1.0...100.0 %rH (Default 5.0%)
40025	Lux Control Setpoint	Unsigned	0..3,000 Lux (Default 400 Lux)
40026	LUX Proportional Band	Unsigned	1..3,000 Lux (Default 400 Lux)
40027	LUX Control Integral Action	Unsigned	0..10,000 seconds
40028	Lux Loop Operating Mode	Unsigned	0 = Reverse Control 1 = Direct Control
40029	LUX Digital Output Mode Hysteresis	Unsigned	1..3,000 Lux (Default 100 Lux)
40030	Amber Alarm LED Switching Point	Unsigned	0..5000 (Default 750)
40031	Red Alarm LED Switching Point	Unsigned	0..5000 (Default 1250)
40032	Alarm LED Hysteresis	Unsigned	0..5000 (Default 50)
40033	Alarm LED Mode	Unsigned	0 = CO2 (default) 1 = Temperature 2 = Humidity 3 = LUX
40034	Delay Time Setting for Occupancy	Unsigned	1..7200 Seconds
40035	Delay Time Setting for Push Button	Unsigned	1..28800 Seconds
40036	Setpoint Adjuster / Potentiometer Low Position	REAL	-500.0..0 (-3.0) Default
40037	Setpoint Adjuster / Potentiometer High Position	REAL	0..+500.0 (3.0) Default
40038	Setpoint Value Influence to Control Setpoint	Unsigned	0 = No Influence 1 = CO2 Control 2 = Temperature 3 = Humidity 4 = Lux

	Property Name /ID	Attributes	Range	Default
Required Object Properties	Object Identifier	R		proprietary-128
	Object Name	R/W		"App_Config2"
	Object Type	R		proprietary-128
Optional Properties	None			

	Property ID	Description	BACnet Data Type	Range
Proprietary Properties	40039	Temperature Unit Selection	Unsigned	0 = Celsius 1 = Fahrenheit
	40040	Language Selection (for display rH vs FH)	Unsigned	0 = English (default) 1 = German
	40041	Display Mode	Unsigned	0 = Rotate Installed 1 = CO2 Only 2 = Temperature Only 3 = LUX Only
	40042	Analogue Output Maximum CO2 Scaling	Unsigned	1000..5000 ppm (Default = 2,000 ppm)
	40043	Analogue Output Maximum Temperature Scaling	Unsigned	0.1...150.0°C/°F (Default 50°C)
	40044	Analogue Output Humidity Maximum Scaling	Unsigned	0.1...100.0 %rH (Default 100.0%)
	40045	Analogue Output Maximum Lux Scaling	Unsigned	1000..3,000 Lux (Default 3,000 Lux)
	40046	One Point CO2 Calibration Field	REAL	-200..+200ppm (Default 0ppm)
	40047	One Point Temperature Calibration Field	REAL	-3.0..+3.0°C/°K (Default 0°C)
	40048	One Point Humidity Calibration Field	REAL	-5.0..+5.0 %rH (Default 0 %rH)
	40050	MAC Address	Unsigned	0..255
	40051	Baud Rate	Unsigned	0 = 9600 (Default) 1 = 19200 2 = 38400 3 = 76800
	40067	Hold On Delay Setting for Digital Input 1	Unsigned	1..28800 Seconds
	40068	Hold On Delay Setting for Digital Input 2	Unsigned	1..28800 Seconds
	40069	Push Button 1 Mode	Unsigned	0 = Local 1 = BMS
	40076	Push Button 2 Mode	Unsigned	0 = Local 1 = BMS
	40077	Push Button 3 Mode	Unsigned	0 = Local 1 = BMS
	40078	Push Button 4 Mode	Unsigned	0 = Local 1 = BMS
	40080	LCD Backlight Level	Unsigned	0..10
	40081	Reset SPA on Setpoint Change	Unsigned	0 = Disabled 1 = Enabled
40078	Save SPA (user adjustment on exit)	Unsigned	0 = Disabled 1 = Enabled	
40082	Setpoint Adjustment Step	Unsigned	0 = 0.1°C/°F (default) 1 = 0.5°C/°F 1 = 1°C/°F	
40100	Force Reset	Unsigned	0 = Normal 1 = Force Reset	

40101	Non Volatile Memory Update	Unsigned	0 = Normal 1 = Update
40103	Force Factory Defaults	Unsigned	0 = Normal 1 = Force Defaults
40104	Force 0..10V Output Calibration Routine	Unsigned	0 = Normal 1 = Force Calibration
40105	Force CO2 Sensor Calibration Routine	Unsigned	0 = Normal 1 = Force Calibration
40106	Enable / Disabled CO2 Auto-Calibration	Unsigned	0 = Disable 1 = Enable
40107	Set Manual CO2 Calibration Level	Unsigned	0...5000 (Read Only)

NOTE:Information is subject to change without prior notice.

Dimensions

