



**Feature**

- Width only 35mm (2SU)
- 4:1 ultrawide input range
- -40~+85°C wide working temperature
- No minimum load required
- DC output adjustable ( $\pm 10\%$ )
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Protections: Short circuit / Overload / Over voltage / Input reverse polarity / Input under voltage protection
- 3KVdc I/O isolation(Reinforced isolation)
- 3 years warranty

**Applications**

- Industrial control system
- Semi-conductor fabrication equipment
- Factory automation
- Electro-mechanical
- Wireless network
- Telecom or datacom system


**Description**

DDR-30 series is a 30W DIN Rail type DC-DC converter with main features including DIN rail-type easy installation, ultra slim width (35mm), 4:1 wide input voltage, -40~+85°C wide operating temperature, 3KVdc I/O isolation, adjustable output voltage ( $\pm 10\%$ ) and full protective functions...etc.

This series has two input options: 9~36V / 18~75V and various output options: 5V / 12V / 15V / 24V and can be used for industrial control, security control, communication system and other fields. Suitable applications are DC buck/boost regulator, increasing system insulation level and voltage drop compensation along cable...etc.

**Model Encoding**

DDR - 30 **G** - **24**

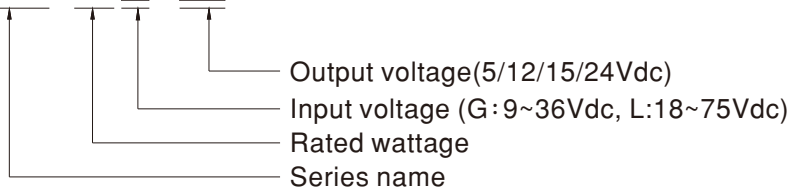




SPECIFICATION


MODEL		DDR-30G-5	DDR-30G-12	DDR-30G-15	DDR-30G-24	DDR-30L-5	DDR-30L-12	DDR-30L-15	DDR-30L-24		
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	5V	12V	15V	24V		
	RATED CURRENT	6A	2.5A	2A	1.25A	6A	2.5A	2A	1.25A		
	CURRENT RANGE	0 ~ 6A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.25A	0 ~ 6A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.25A		
	RATED POWER	30W	30W	30W	30W	30W	30W	30W	30W		
	RIPPLE & NOISE (max.) Note.2	60mVp-p	75mVp-p	75mVp-p	100mVp-p	60mVp-p	75mVp-p	75mVp-p	100mVp-p		
	VOLTAGE ADJ. RANGE	4.5 ~ 5.5V	9 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 28V	4.5 ~ 5.5V	9 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 28V		
	VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%		
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
	LOAD REGULATION	±1.5%	±0.5%	±0.5%	±0.5%	±1.5%	±0.5%	±0.5%	±0.5%		
	SETUP, RISE TIME	120ms, 85ms at full load									
HOLD UP TIME (Typ.)	4ms@12Vdc, 8ms@24Vdc, 16ms@48Vdc										
INPUT	EXTERNAL CAPACITANCE LOAD (Max.)	3300 μF	2200 μF	1500 μF	1000 μF	3300 μF	2200 μF	1500 μF	1000 μF		
	VOLTAGE RANGE Note.4	9 ~ 36Vdc				18 ~ 75Vdc					
	EFFICIENCY (Typ.)	85%	86%	87%	89%	86%	89%	90%	91%		
	DC CURRENT (Typ.)	1.5A/24Vdc				0.8A/48Vdc					
	INRUSH CURRENT (Typ.)	15A/24Vdc				15A/48Vdc					
PROTECTION	OVERLOAD	110 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed									
	OVER VOLTAGE	5.75 ~ 7V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.8 ~ 34V	5.75 ~ 7V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.8 ~ 34V		
	REVERSE POLARITY	By internal MOSFET, no damage, recovers automatically after fault condition removed									
	UNDER VOLTAGE LOCKOUT	24Vin (G-type):Power On ≥9V , Off ≤8.5V 48Vin (L-type):Power On ≥18V , Off ≤17V									
ENVIRONMENT	WORKING TEMP.	-40 ~ +85°C (Refer to "Derating Curve")									
	WORKING HUMIDITY	5 ~ 95% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 5 ~ 95% RH non-condensing									
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)									
	VIBRATION	Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6									
SAFETY & EMC (Note 5)	SAFETY STANDARDS	IEC 62368 (LVD) approved, Design refer to EN61558-2-16 / UL508									
	WITHSTAND VOLTAGE	I/P-O/P:3KVdc									
	ISOLATION RESISTANCE	I/P-O/P>100M Ohms / 500Vdc / 25°C / 70% RH									
	EMC EMISSION	Parameter	Standard			Test Level / Note					
		Conducted	EN55032			Class B					
		Radiated	EN55032			Class B					
		Voltage Flicker	EN61000-3-3			-----					
	EMC IMMUNITY	EN55024 , EN61000-6-2(EN50082-2), EN61204-3									
		Parameter	Standard			Test Level / Note					
		ESD	EN61000-4-2			Level 3, 8KV air ; Level 3, 6KV contact; criteria A					
		Radiated	EN61000-4-3			Level 3, 10V/m ; criteria A					
		EFT / Burst	EN61000-4-4			Level 3, 2KV ; criteria A					
		Surge	EN61000-4-5			Level 3, 1KV/Line-Line ; criteria A					
Conducted		EN61000-4-6			Level 3, 10V ; criteria A						
Magnetic Field	EN61000-4-8			Level 4, 30A/m ; criteria A							
OTHERS	MTBF	483.3K hrs min. MIL-HDBK-217F (25°C)									
	DIMENSION	35*90*54.5mm (W*H*D)									
	PACKING	0.12Kg;96pcs/12.5Kg/1.04CUFT									
NOTE	<p>1. All parameters NOT specially mentioned are measured at normal input (G:24Vdc, L:48Vdc), rated load and 25°C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Derating may be needed under low input voltage. Please check the derating curve for more details.</p> <p>5. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a>)</p>										

■ Block Diagram


fosc : 100KHz

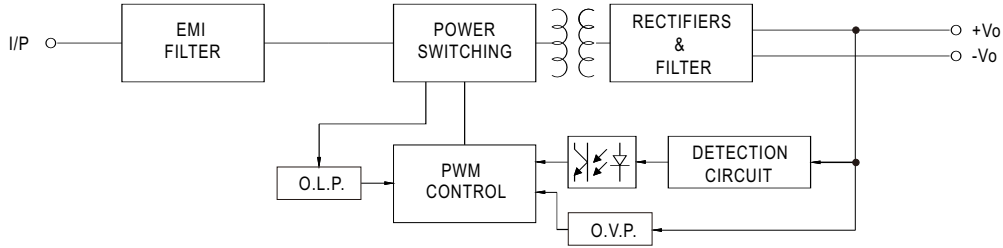

■ Derating Curve


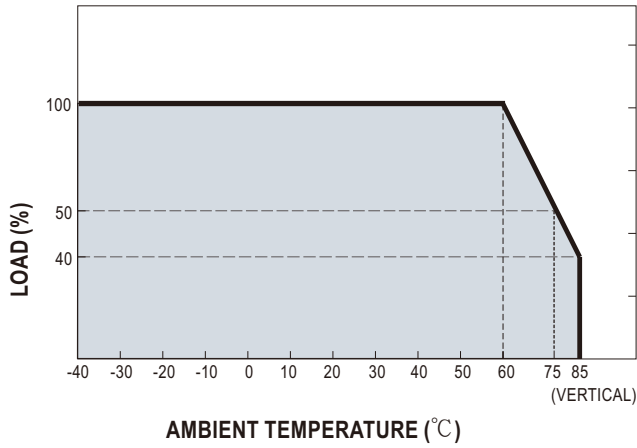


■ Output derating VS input voltage

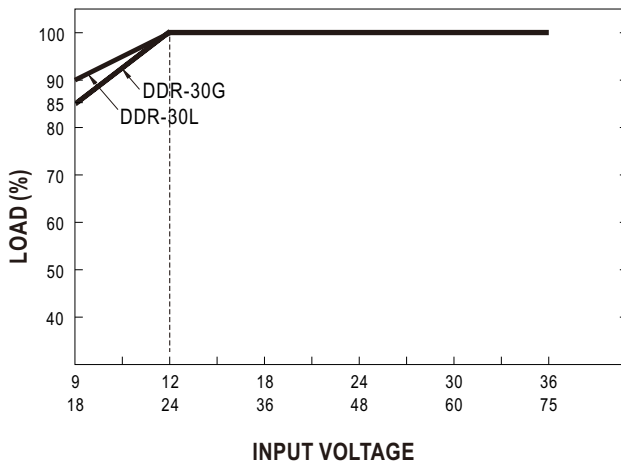

**Mechanical Specification**

(Unit: mm , tolerance  $\pm 0.5\text{mm}$ )

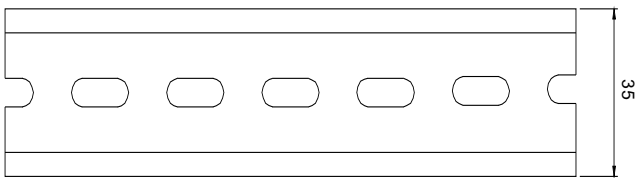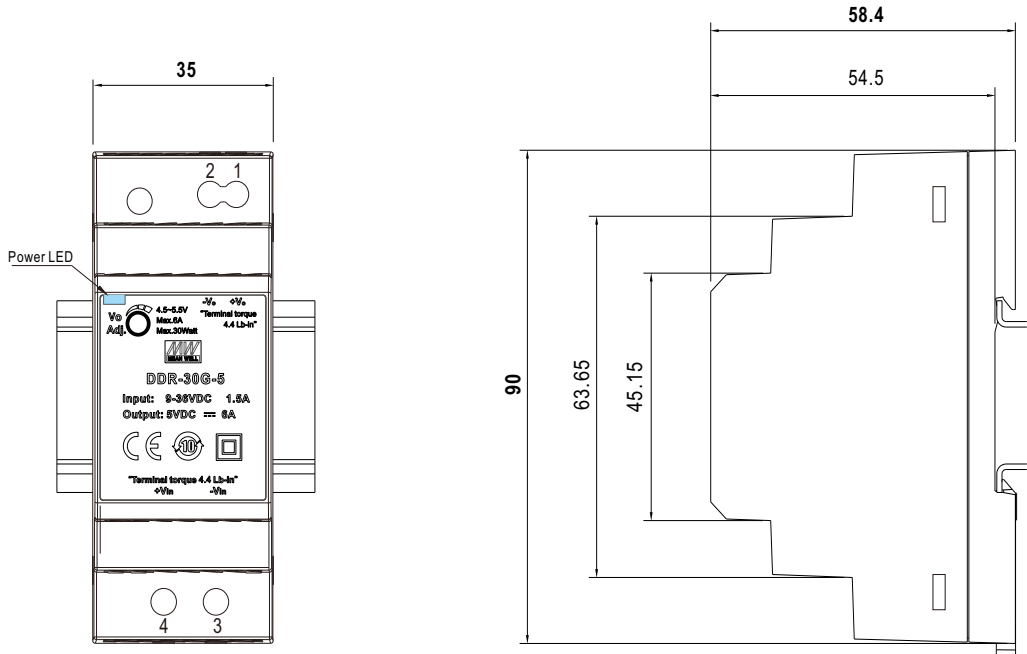

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

Terminal Pin No. Assignment

Pin No.	Assignment
1	DC Output +Vo
2	DC Output -Vo
3	DC Input -Vin
4	DC Input +Vin

**Installation Manual**

Please refer to : <http://www.meanwell.com/manual.html>