


## T SERIES CONTROL TRANSFORMERS – 240VAC to 24VAC



### IP2X RoHS AS/NZS CE

<b>Input Voltage</b>	240VAC +/-5%
<b>Output Voltage</b>	24VAC
<b>Frequency</b>	50/60Hz
<b>Rating</b>	20VA – 1000VA
<b>Temperature Rise</b>	60degC

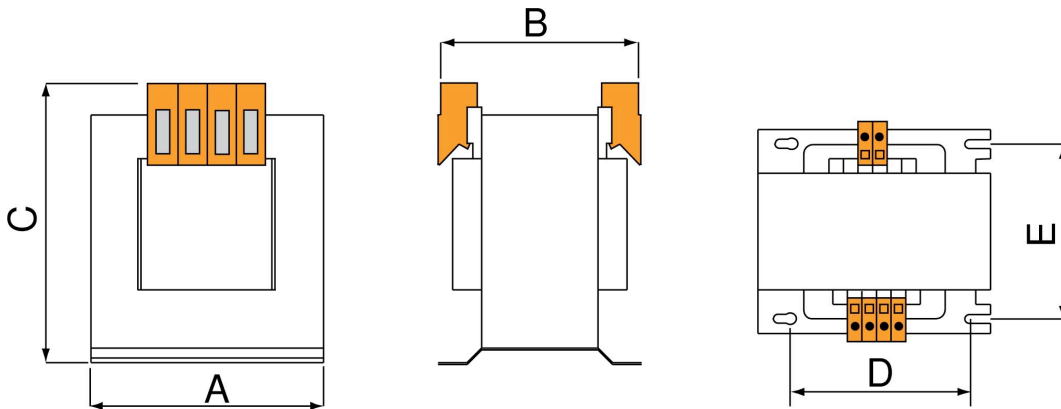

MODEL	VA RATING	Dims AxBxC (mm)	Weight (Kg)
T20-240-24**	20VA	67 x 58 x 65	0.9
T20-240-24/DIN	20VA		
T40-240-24	40VA	78 x 72 x 95	1.4
T40-240-24/DIN	40VA		
T63-240-24	63VA	78 x 72 x 95	1.5
T63-240-24/DIN	63VA		
T100-240-24	100VA	87 x 75 x 98	1.8
T100-240-24/DIN	100VA		
T160-240-24	160VA	96 x 92 x 110	2.5
T250-240-24	250VA	96 x 100 x 110	3.4
T400-240-24	400VA	120 x 100 x 130	5.6
T630-240-24	630VA	150 x 110 x 155	8.4
T800-240-24	800VA	150 x 130 x 155	9.5

\*\* 20VA model uses a saddle mount bracket and does not have +/- 5% taps  
 Note: DIN Rail Mounting is not available for transformers above 100VA